

BPL 101-50

Photoluminescent Exit Sign



BRIGHT PATH LIGHTING, INC.

1-877-343-7300



Lights off

Viewing distance of 50'

15 Year Limited Warranty



Two self-adhesive directional indicators are supplied with each sign. Small dots are also provided to the left of the letter E and to the right of the letter T for easy alignment.

- Non-electric
- Non-radioactive
- Non-hazardous
- No expiration date
- Energy efficient
- LEED points qualified
- Zero annual operating expense
- No batteries
- No bulbs
- Low maintenance
- 100% reliable
- High or low level
- Simple installation
- 25+ year life expectancy



California State
Fire Marshal Approved

Red Letters



Green Letters



The BPL 101-50 UL 924 Listed EXIT signs are available with durable anodized aluminum frames. The frames have been designed for ceiling, T-bar, flag, or surface mount applications and can accommodate single or double face signs. We stock our clear anodized aluminum frames. All other colored frames are special order, so please allow extra time for delivery. Additional custom frame colors are available upon request. Two directional chevrons and all mounting hardware are included with each sign. Designed for maximum durability, the BPL 101-50 Series Photoluminescent Exit Sign is Constructed out of rigid PVC. Ideal for high and low level applications. Easy peel and stick directional chevrons. UL 924 Listed with four external charging light sources: fluorescent, metal halide, LED, and mercury vapor.

specifications

BPL101-50

Letter Size:	1" Stroke with 7" Height
Letter Color:	Green or Red
Background:	Photoluminescent
Directional:	Two directional chevrons included for field application.
Viewing Distance:	50 Feet
Life Expectancy:	25+ Years
Applications:	High and Low Level, indoor use only.
Installation:	Minimum 5 foot-candle (54 lux) external unfiltered fluorescent, metal halide or mercury vapor illumination must be present on the sign face at all times of building occupancy.
Sign Substrate:	Photoluminescent self-extinguishing PVC.
Frame Substrate:	Aluminum
Features:	Non-electrical, non-radioactive, explosion proof, UV-stable, durable, minimal installation and maintenance expense
Compliance:	UL 924 Listed, Energy Star Listed, Meets NFPA 101 Life Safety Code, NFPA 5000, JCAHO & OSHA, ICC - IBC, ICBO - UBC, BOCA - NBC, SBCCI - SBC, 1/UFC, CA Bldg. Code, ASTM 2072, and CSFM Listed
Warranty:	15-year limited warranty to the original customer covering any defects in material or workmanship.

Catalog Model #	Mounting	Frame Color	Number of Faces	Letter Color
BPL10150F	C - Ceiling F - Flag S - Surface T - T-Bar U - Universal W - Window	A - Anodized Aluminum B - Anodized Bronze BL - Anodized Black G - Anodized Gold W - Powder Coat White	S - Single* D - Double	G - Green R - Red


*Back plates available for an additional charge.

Frame Colors




Aluminum Black Bronze Gold White Red Green

Ceiling Mount

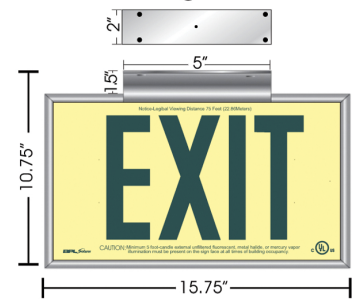

T-Bar Ceiling Mount

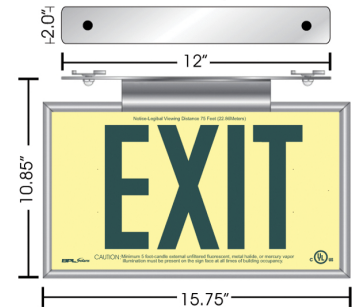


Surface Mount



Flag Mount



Low Location Window Mount

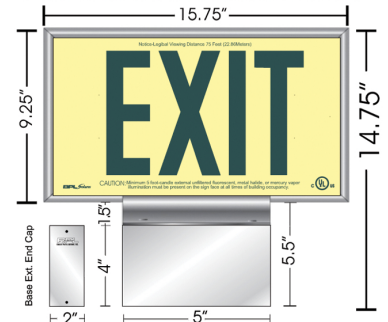

BPL
BRIGHT PATH LIGHTING, INC.

Ph: 559-443-7300 • 877-343-7300
2910 E. Heaton, Ste. B • Fresno, CA 93721
www.bplighting.com