


**GLO
maxx 50**

GM50
15 Year Limited Warranty


BPL
BRIGHT PATH LIGHTING, INC.
559-443-7300 • Fresno, CA 93721



The ultimate impact resistant, metal constructed UL 924 Listed Photoluminescent Exit Sign



Lights off



Easy to remove chevrons



- Non-electric
- Non-radioactive
- Non-hazardous
- No expiration date
- Energy efficient
- LEED points qualified
- Zero annual operating expense
- No batteries
- No bulbs
- Low maintenance
- 100% reliable
- High or low level
- Simple installation
- 25+ year life expectancy



Designed for maximum durability, the Glow Maxx 50 Series Photoluminescent Exit Sign is constructed using a steel stencil face plate with aluminum photoluminescent insert. Ideal for high and low level applications. Easy pop out directional chevrons. UL 924 Listed with four external charging light sources: fluorescent, metal halide, LED, and mercury vapor.

specifications

Overall Size: 15.5"W x 8.5"H x 1/4" Depth
 Letter Size: 1" Stroke, 7" Height
 Weight: 3 lbs
 Construction: Steel stencil face plate with aluminum insert coated with Strontium Oxide Aluminate photoluminescent pigment

Face Plate Colors: Black, Green, Red, Silver and White
 Letter Color: Photoluminescent, Green Illuminating
 Directional: Pop-out directional chevrons
 Initial Activation: Based on UL 924 Standards, requires minimum 5 foot-candles (54 lux) of unfiltered fluorescent, metal halide, LED or mercury vapor lighting for 60 minutes.

Installation: Install photoluminescent Exit signs only in locations where an external illumination source is present, is deemed reliable, and is supplied by a circuit not controlled by automatic timers or sensors and where controls are accessible only to authorized personnel. This reliable external illumination source is to be energized at all times during building occupancy.

Viewing Distance: 50 Feet - Sign will remain visible and legible in total darkness to observers standing 50 feet away from the sign for at least 90 minutes after all light has been extinguished.

Life Expectancy: 25+ years

Applications: High and low level, indoor use only

Approvals: UL 924 Listed, Meets NFPA 101 Life Safety Code, NFPA 5000, JCAHO & OSHA, ICC, - IBC, ICBO - UBC, BOCA - NBC, SBCCI - SBC, 1/UFC, CA Bldg. Code, ASTM 2072 and CSFM Listed


Product Care: Periodically clean the sign face with a damp cloth, and conduct periodic inspections to ensure the sign is clear and visible.

Warranty: 15 year limited warranty from the date of shipment against defects in workmanship and materials to the original customer

Mounting Options Surface • Ceiling • Flag • T-Bar




Front with Universal Bracket

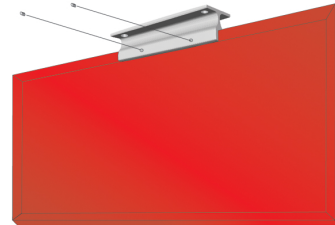



Back, 10-24 X 5/16 Set Screw Location



Front Surface Mount, #8-1 1/2 Phillips Pan-Head Screws



T-Bar mounting unit

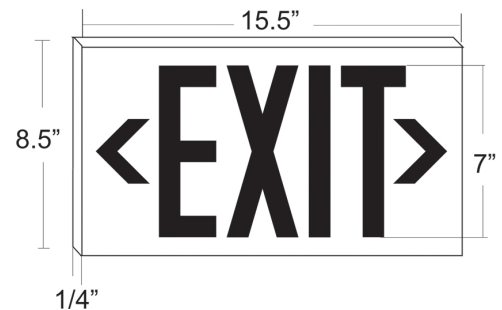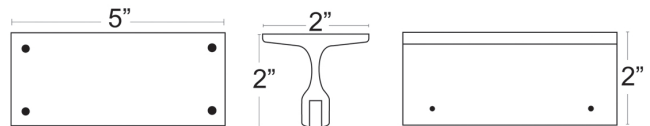

Description

black, wall mount exit sign
 black, single-sided sign w/bracket
 black, double-sided sign w/bracket
 black, single-sided sign w/T-bar bracket
 black, double-sided sign w/T-bar bracket
 silver, wall mount exit sign
 silver, single-sided sign w/bracket
 silver, double-sided sign w/bracket
 silver, single-sided sign w/T-bar bracket
 silver, double-sided sign w/T-bar bracket
 red, wall mount exit sign
 red, single-sided sign w/bracket
 red, double-sided sign w/bracket
 red, single-sided sign w/T-bar bracket
 red, double-sided sign w/T-bar bracket
 green, wall mount exit sign
 green, single-sided sign w/bracket
 green, double-sided sign w/bracket
 green, single-sided sign w/T-bar bracket
 green, double-sided sign w/T-bar bracket
 white, wall mount exit sign
 white, single-sided sign w/bracket
 white, double-sided sign w/bracket
 white, single-sided sign w/T-bar bracket
 white, double-sided sign w/T-bar bracket

Item No.'s

GM50WB
 GM50SB
 GM50DB
 GM50STB
 GM50DTB
 GM50WS
 GM50SS
 GM50DS
 GM50STS
 GM50DTS
 GM50WR
 GM50SR
 GM50DR
 GM50STR
 GM50DTR
 GM50WG
 GM50DG
 GM50STG
 GM50DTG
 GM50WWW
 GM50SW
 GM50DW
 GM50STW
 GM50DTW