

# GLO maxx 75

# GM75

15 Year Limited Warranty

# BPL

BRIGHT PATH LIGHTING, INC.  
559-443-7300 • Fresno, CA 93721

Viewing distance of 75'

"Notice - Legible Viewing Distance 75 feet"



BPL GM50  
MADE IN THE U.S.A.

UL  
LISTED  
E205969  
BPL GM50  
43179

Min 5 fc fluorescent, metal halide or mercury vapor light on sign face at all times of building occupancy. Suitable for Floor Proximity Installation.

## The ultimate impact resistant, metal constructed UL 924 Listed Photoluminescent Exit Sign



Lights off



Pair of Peel & Stick Directional Chevrons

Available Colors



Black



White



Silver



Red



Green



- Non-electric
- Non-radioactive
- Non-hazardous
- No expiration date
- Energy efficient
- LEED points qualified
- Zero annual operating expense
- No batteries
- No bulbs
- Low maintenance
- 100% reliable
- High or low level
- Simple installation
- 25+ year life expectancy

Designed for maximum durability, the Glow Maxx 75 Series Photoluminescent Exit Sign is constructed using a steel stencil face plate with aluminum photoluminescent letters. Ideal for high and low level applications. Easy stick on directional chevrons. UL 924 Listed with four external charging light sources: fluorescent, metal halide, LED, and mercury vapor.

# specifications

Overall Size: 15.5"W x 8.5"H x 1/4" Depth  
 Letter Size: 1" Stroke, 7.5" Height  
 Weight: 3 lbs  
 Construction: Steel stencil face plate with aluminum insert coated with Strontium Oxide Aluminate photoluminescent pigment

Face Plate Colors: Black, Green, Red, Silver and White  
 Letter Color: Photoluminescent, Green Illuminating  
 Directional: Pop-out directional chevrons  
 Initial Activation: Based on UL 924 Standards, requires minimum 5 foot-candles (54 lux) of unfiltered fluorescent, metal halide, LED or mercury vapor lighting for 60 minutes.

Installation: Install photoluminescent Exit signs only in locations where an external illumination source is present, is deemed reliable, and is supplied by a circuit not controlled by automatic timers or sensors and where controls are accessible only to authorized personnel. This reliable external illumination source is to be energized at all times during building occupancy.


Viewing Distance: 75 Feet - Sign will remain visible and legible in total darkness to observers standing 50 feet away from the sign for at least 90 minutes after all light has been extinguished.

Life Expectancy: 25+ years  
 Applications: High and low level, indoor use only  
 Approvals: UL 924 Listed, Meets NFPA 101 Life Safety Code, NFPA 5000, JCAHO & OSHA, ICC, - IBC, ICBO - UBC, BOCA - NBC, SBCCI - SBC, 1/UFC, CA Bldg. Code, ASTM 2072 and CSFM Listed  
 Product Care: Periodically clean the sign face with a damp cloth, and conduct periodic inspections to ensure the sign is clear and visible.  
 Warranty: 15 year limited warranty from the date of shipment against defects in workmanship and materials to the original customer

## Mounting Options Surface • Ceiling • Flag • T-Bar



Front with Universal Bracket

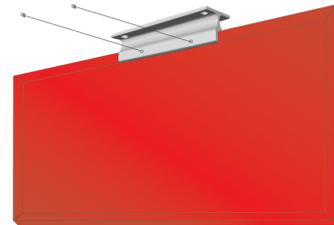


Back, 10-24 X 5/16 Set Screw Location



Front Surface Mount, #8-1 1/2 Phillips Pan-Head Screws



T-Bar mounting unit

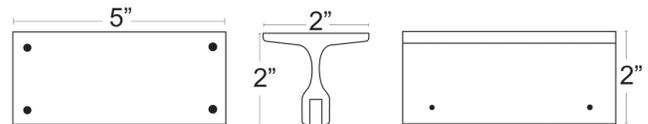

### Description

black, wall mount exit sign  
 black, single-sided sign w/bracket  
 black, double-sided sign w/bracket  
 black, single-sided sign w/T-bar bracket  
 black, double-sided sign w/T-bar bracket  
 silver, wall mount exit sign  
 silver, single-sided sign w/bracket  
 silver, double-sided sign w/bracket  
 silver, single-sided sign w/T-bar bracket  
 silver, double-sided sign w/T-bar bracket  
 red, wall mount exit sign  
 red, single-sided sign w/bracket  
 red, double-sided sign w/bracket  
 red, single-sided sign w/T-bar bracket  
 red, double-sided sign w/T-bar bracket  
 green, wall mount exit sign  
 green, single-sided sign w/bracket  
 green, double-sided sign w/bracket  
 green, single-sided sign w/T-bar bracket  
 green, double-sided sign w/T-bar bracket  
 white, wall mount exit sign  
 white, single-sided sign w/bracket  
 white, double-sided sign w/bracket  
 white, single-sided sign w/T-bar bracket  
 white, double-sided sign w/T-bar bracket

### Item No.'s

GM50WB  
 GM50SB  
 GM50DB  
 GM50STB  
 GM50DTB  
 GM50WS  
 GM50SS  
 GM50DS  
 GM50STS  
 GM50DTS  
 GM50WR  
 GM50SR  
 GM50DR  
 GM50STR  
 GM50DTR  
 GM50WG  
 GM50DG  
 GM50STG  
 GM50DTG  
 GM50WWW  
 GM50SW  
 GM50DW  
 GM50STW  
 GM50DTW